


## SL192305-XL

圓柱滾子軸承

舍弗勒ID :

`{ctx.productData.sapMaterialNumber}`

### 技术信息

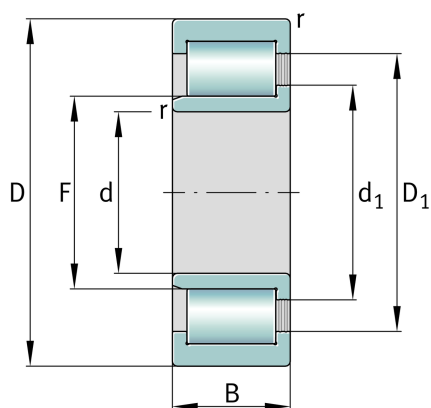

#### 主要尺寸和性能数据

d	25 mm	Bore diameter
D	62 mm	Outside diameter
B	24 mm	Width
$C_r$	73,000 N	Basic dynamic load rating, radial
$C_{0r}$	59,000 N	Basic static load rating, radial
$C_{ur}$	9,600 N	Fatigue load limit, radial
$n_G$	8,100 1/min	Limiting speed
$n_{gr}$	4,800 1/min	Reference speed
	0 kg	重量

#### 尺寸

$D_1$	47.5 mm	Shoulder diameter outer ring
$D_{a\max}$	47.5 mm	Maximum diameter of housing shoulder
$d_1$	36.7 mm	Shoulder diameter inner ring
$d_{a\min}$	31.5 mm	Minimum diameter shaft shoulder
$d_{c\min}$	36.5 mm	Minimum shaft shoulder
F	31.7 mm	Raceway diameter inner ring
$r_{a\max}$	1.1 mm	Maximum fillet radius
$r_{\min}$	1.1 mm	Minimum chamfer dimension
s	2 mm	Axial displacement