


SL192311-XL

圓柱滾子軸承

舍弗勒ID :

`{ctx.productData.sapMaterialNumber}`

技术信息

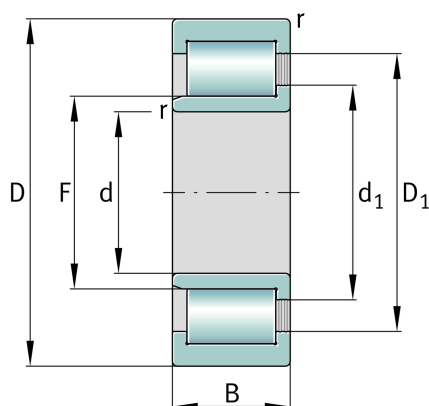

主要尺寸和性能数据

d	55 mm	Bore diameter
D	120 mm	Outside diameter
B	43 mm	Width
C_r	270,000 N	Basic dynamic load rating, radial
C_{0r}	250,000 N	Basic static load rating, radial
C_{ur}	48,500 N	Fatigue load limit, radial
n_G	3,750 1/min	Limiting speed
n_{gr}	2,550 1/min	Reference speed
	0 kg	重量

尺寸

D_1	99.3 mm	Shoulder diameter outer ring
$D_{a\max}$	99 mm	Maximum diameter of housing shoulder
d_1	75.5 mm	Shoulder diameter inner ring
$d_{a\min}$	67 mm	Minimum diameter shaft shoulder
$d_{c\min}$	75.5 mm	Minimum shaft shoulder
F	67.1 mm	Raceway diameter inner ring
$r_{a\max}$	2 mm	Maximum fillet radius
r_{\min}	2 mm	Minimum chamfer dimension
s	3 mm	Axial displacement