


## SL192312-XL

圓柱滾子軸承

舍弗勒ID :

`{ctx.productData.sapMaterialNumber}`

### 技术信息

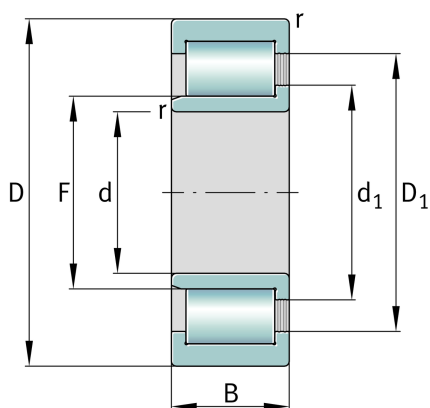

#### 主要尺寸和性能数据

d	60 mm	Bore diameter
D	130 mm	Outside diameter
B	46 mm	Width
$C_r$	285,000 N	Basic dynamic load rating, radial
$C_{0r}$	275,000 N	Basic static load rating, radial
$C_{ur}$	54,000 N	Fatigue load limit, radial
$n_G$	3,500 1/min	Limiting speed
$n_{gr}$	2,480 1/min	Reference speed
	0 kg	重量

#### 尺寸

$D_1$	105.8 mm	Shoulder diameter outer ring
$D_{a\max}$	105.5 mm	Maximum diameter of housing shoulder
$d_1$	82 mm	Shoulder diameter inner ring
$d_{a\min}$	73.5 mm	Minimum diameter shaft shoulder
$d_{c\min}$	82 mm	Minimum shaft shoulder
F	73.6 mm	Raceway diameter inner ring
$r_{a\max}$	2.1 mm	Maximum fillet radius
$r_{\min}$	2.1 mm	Minimum chamfer dimension
s	3 mm	Axial displacement