


## SL192316-XL

圓柱滾子軸承

舍弗勒ID :

`#{ctx.productData.sapMaterialNumber}`

### 技术信息

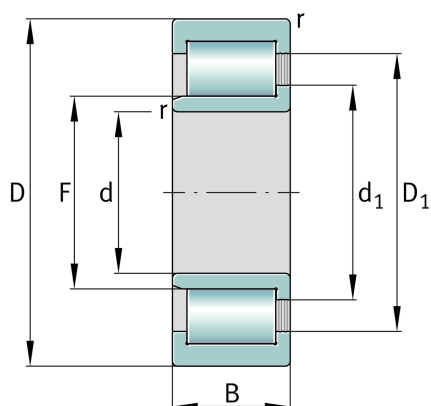

#### 主要尺寸和性能数据

d	80 mm	Bore diameter
D	170 mm	Outside diameter
B	58 mm	Width
$C_r$	540,000 N	Basic dynamic load rating, radial
$C_{0r}$	560,000 N	Basic static load rating, radial
$C_{ur}$	101,000 N	Fatigue load limit, radial
$n_G$	2,600 1/min	Limiting speed
$n_{gr}$	1,820 1/min	Reference speed
	0 kg	重量

#### 尺寸

$D_1$	142.1 mm	Shoulder diameter outer ring
$D_{a\max}$	142 mm	Maximum diameter of housing shoulder
$d_1$	109.5 mm	Shoulder diameter inner ring
$d_{a\min}$	98 mm	Minimum diameter shaft shoulder
$d_{c\min}$	109.5 mm	Minimum shaft shoulder
F	98.2 mm	Raceway diameter inner ring
$r_{a\max}$	2.1 mm	Maximum fillet radius
$r_{\min}$	2.1 mm	Minimum chamfer dimension
s	3.5 mm	Axial displacement