


SL192317-XL

圓柱滾子軸承

舍弗勒ID :

`{ctx.productData.sapMaterialNumber}`

技术信息

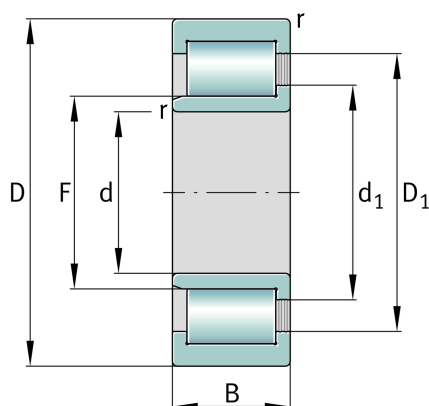

主要尺寸和性能数据

d	85 mm	Bore diameter
D	180 mm	Outside diameter
B	60 mm	Width
C_r	570,000 N	Basic dynamic load rating, radial
C_{0r}	610,000 N	Basic static load rating, radial
C_{ur}	108,000 N	Fatigue load limit, radial
n_G	2,410 1/min	Limiting speed
n_{gr}	1,710 1/min	Reference speed
	0 kg	重量

尺寸

D_1	150.9 mm	Shoulder diameter outer ring
$D_{a\max}$	150.5 mm	Maximum diameter of housing shoulder
d_1	118.2 mm	Shoulder diameter inner ring
$d_{a\min}$	107 mm	Minimum diameter shaft shoulder
$d_{c\min}$	118 mm	Minimum shaft shoulder
F	107 mm	Raceway diameter inner ring
$r_{a\max}$	3 mm	Maximum fillet radius
r_{\min}	3 mm	Minimum chamfer dimension
s	4 mm	Axial displacement