


SL192318-TB-XL

圓柱滾子軸承

舍弗勒ID：
0572427800000

技术信息

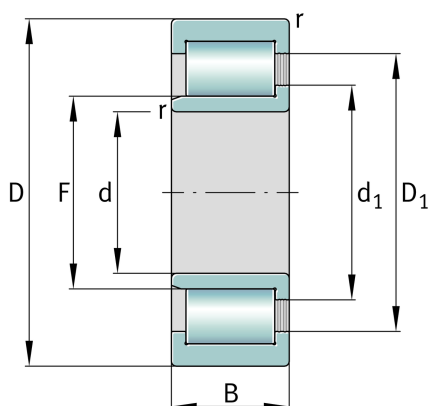

主要尺寸和性能数据

d	90 mm	Bore diameter
D	190 mm	Outside diameter
B	64 mm	Width
C_r	620,000 N	Basic dynamic load rating, radial
C_{0r}	650,000 N	Basic static load rating, radial
C_{ur}	118,000 N	Fatigue load limit, radial
n_G	2,400 1/min	Limiting speed
n_{gr}	1,760 1/min	Reference speed
	8.619 kg	重量

尺寸

D_1	152.5 mm	Shoulder diameter outer ring
$D_{a\max}$	152.5 mm	Maximum diameter of housing shoulder
d_1	117.5 mm	Shoulder diameter inner ring
$d_{a\min}$	105 mm	Minimum diameter shaft shoulder
$d_{c\min}$	117.5 mm	Minimum shaft shoulder
F	105.3 mm	Raceway diameter inner ring
$r_{a\max}$	3 mm	Maximum fillet radius
r_{\min}	3 mm	Minimum chamfer dimension
s	4 mm	Axial displacement

温度范围

T_{\min}	-30 °C	最低工作温度
T_{\max}	120 °C	最高工作温度