


SL192320-TB-XL-BR

圓柱滾子軸承

舍弗勒ID：
0572429840000

技术信息

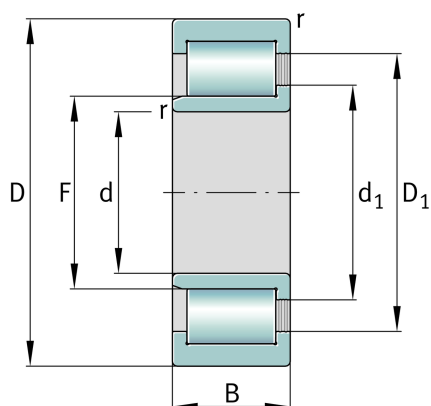

主要尺寸和性能数据

d	100 mm	Bore diameter
D	215 mm	Outside diameter
B	73 mm	Width
C_r	790,000 N	Basic dynamic load rating, radial
C_{0r}	850,000 N	Basic static load rating, radial
C_{ur}	150,000 N	Fatigue load limit, radial
n_G	2,110 1/min	Limiting speed
n_{gr}	1,490 1/min	Reference speed
	12.766 kg	重量

尺寸

D_1	172.8 mm	Shoulder diameter outer ring
$D_{a\max}$	172.5 mm	Maximum diameter of housing shoulder
d_1	132.7 mm	Shoulder diameter inner ring
$d_{a\min}$	119 mm	Minimum diameter shaft shoulder
$d_{c\min}$	132.5 mm	Minimum shaft shoulder
F	119.3 mm	Raceway diameter inner ring
$r_{a\max}$	3 mm	Maximum fillet radius
r_{\min}	3 mm	Minimum chamfer dimension
s	4 mm	Axial displacement

温度范围

T_{\min}	-30 °C	最低工作温度
T_{\max}	120 °C	最高工作温度