


SL192322-TB-XL-BR

圓柱滾子軸承

舍弗勒ID：
0572430420000

技术信息

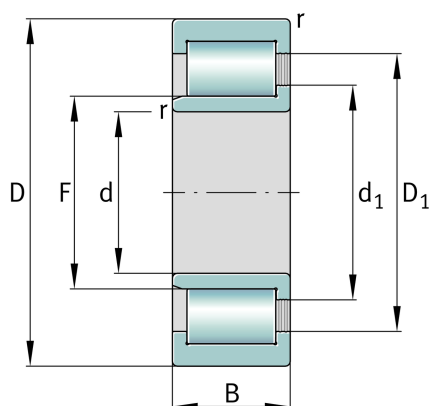

主要尺寸和性能数据

d	110 mm	Bore diameter
D	240 mm	Outside diameter
B	80 mm	Width
C_r	950,000 N	Basic dynamic load rating, radial
C_{0r}	970,000 N	Basic static load rating, radial
C_{ur}	163,000 N	Fatigue load limit, radial
n_G	1,820 1/min	Limiting speed
n_{gr}	1,270 1/min	Reference speed
	16.73 kg	重量

尺寸

D_1	199.9 mm	Shoulder diameter outer ring
$D_{a\max}$	199.5 mm	Maximum diameter of housing shoulder
d_1	151.1 mm	Shoulder diameter inner ring
$d_{a\min}$	134 mm	Minimum diameter shaft shoulder
$d_{c\min}$	151 mm	Minimum shaft shoulder
F	134.3 mm	Raceway diameter inner ring
$r_{a\max}$	3 mm	Maximum fillet radius
r_{\min}	3 mm	Minimum chamfer dimension
s	5 mm	Axial displacement

温度范围

T_{\min}	-30 °C	最低工作温度
T_{\max}	120 °C	最高工作温度