


SL192340-TB-BR

圓柱滾子軸承

舍弗勒ID：
0547119240000

技术信息

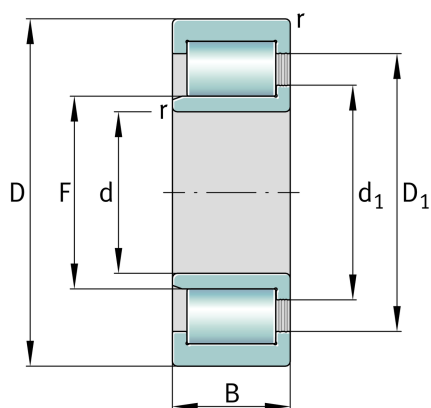

主要尺寸和性能数据

d	200 mm	Bore diameter
D	420 mm	Outside diameter
B	138 mm	Width
C_r	2,470,000 N	Basic dynamic load rating, radial
C_{0r}	3,300,000 N	Basic static load rating, radial
C_{ur}	350,000 N	Fatigue load limit, radial
n_G	1,020 1/min	Limiting speed
n_{gr}	570 1/min	Reference speed
	90.3 kg	重量

尺寸

D_1	347.2 mm	Shoulder diameter outer ring
$D_{a\max}$	347 mm	Maximum diameter of housing shoulder
d_1	265.7 mm	Shoulder diameter inner ring
$d_{a\min}$	238 mm	Minimum diameter shaft shoulder
$d_{c\min}$	265.5 mm	Minimum shaft shoulder
F	238.5 mm	Raceway diameter inner ring
$r_{a\max}$	5 mm	Maximum fillet radius
r_{\min}	5 mm	Minimum chamfer dimension
s	7 mm	Axial displacement

温度范围

T_{\min}	-30 °C	最低工作温度
T_{\max}	120 °C	最高工作温度