


## SL192319-TB-XL

圓柱滾子軸承

舍弗勒ID：  
0572429410000

### 技术信息

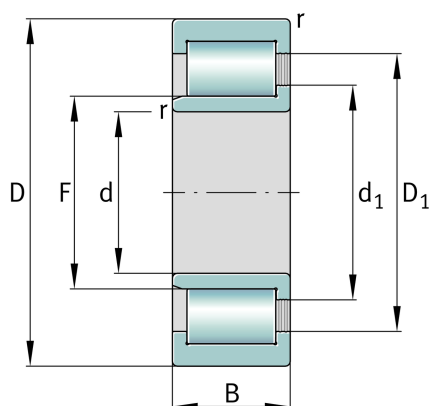

### 主要尺寸和性能数据

d	95 mm	Bore diameter
D	200 mm	Outside diameter
B	67 mm	Width
$C_r$	650,000 N	Basic dynamic load rating, radial
$C_{0r}$	710,000 N	Basic static load rating, radial
$C_{ur}$	126,000 N	Fatigue load limit, radial
$n_G$	2,240 1/min	Limiting speed
$n_{gr}$	1,620 1/min	Reference speed
	10.2 kg	重量

### 尺寸

$D_1$	161.9 mm	Shoulder diameter outer ring
$D_{amax}$	161.5 mm	Maximum diameter of housing shoulder
$d_1$	126.6 mm	Shoulder diameter inner ring
$d_{amin}$	114.5 mm	Minimum diameter shaft shoulder
$d_{cmin}$	126.5 mm	Minimum shaft shoulder
F	114.7 mm	Raceway diameter inner ring
$r_{amax}$	3 mm	Maximum fillet radius
$r_{min}$	3 mm	Minimum chamfer dimension
s	4 mm	Axial displacement

### 温度范围

$T_{min}$	-30 °C	最低工作温度
$T_{max}$	120 °C	最高工作温度